

Ifo CERO WATERLESS URINAL

Installation & Maintenance Instructions





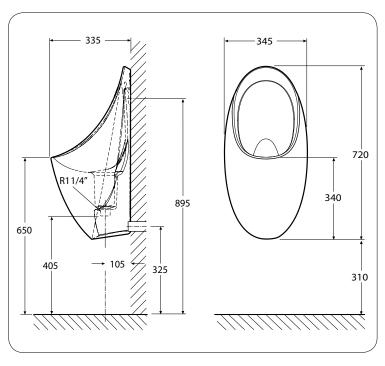


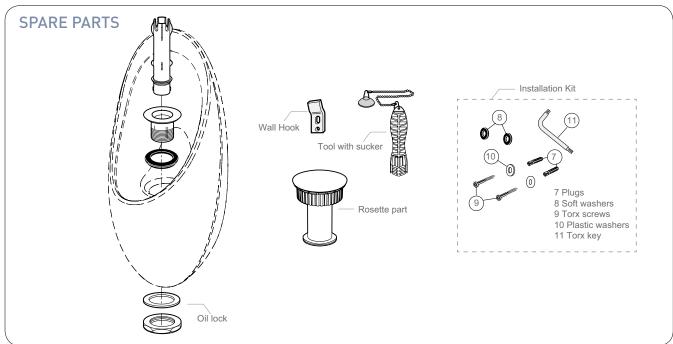







MOUNTING INSTRUCTIONS

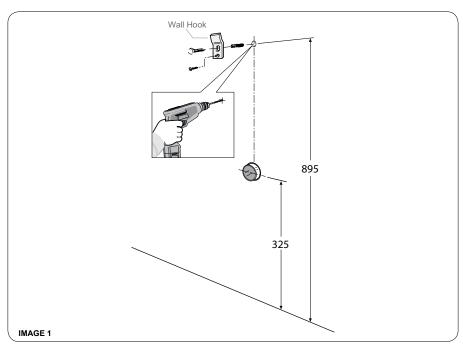



1. Prepare rough in positions for wall hook and outlet. **SEE IMAGE 1**.






- 2. Pencil mark screw wall fixing. **SEE IMAGE 2.**
- 3. Pre-drill screw wall fixing points and add wall plugs. **SEE IMAGE 3**.






- 4. Insert soft washers into urinal wall fixing screw holes. **SEE IMAGE 4.**
- 5. Lift urinal bowl onto wall hook and into waste outlet. **SEE IMAGE 5**

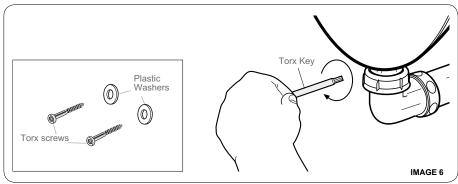


6. Fix torx crews to ensure the urinal is firmly fixed to the wall. **SEE IMAGE 6**

Call 1300 369 273 www.enware.com.au/ifo


CLEANING INSTRUCTIONS - Daily







2. Wearing protective gloves scrub the urinal surface immediately after the Cero Detergent has been applied. **SEE IMAGE 8**





3. Wipe the surface off with a cloth. **SEE IMAGE 9**

NOTE: Do not rinse the area with water as water can cause build up of urine crystallization within the urinal & pipes.


* CERO DETERGENT Product Code IFO91864

OIL CHANGE - Monthly






- 1. Lift out the urinal rosette. **SEE IMAGE 10**
- 2. Turn the urinal inner rod anti clock wise half a turn and pull it out of the urinal. **SEE IMAGE 11**



* CERO DETERGENT Product Code IFO91864




- 3. Spray and soak the parts (urinal rosette and inner rod) as well as the cavity of the urinal bowl with Cero Detergent* SEE IMAGE 12
- Scrub the parts (urinal rosette and inner rod) as well as the cavity of the urinal bowl SEE IMAGE 13


3

CONTINUED OVER PAGE ...

www.enware.com.au/ifo Call 1300 369 273

OIL CHANGE - Monthly





- Thoroughly rinse and scrub the cavity of the urinal bowl.SEE IMAGE 14
- 6. Insert the urinal inner rod into the urinal cavity. Twisting it half a turn to seal the cavity area. **SEE IMAGE 15**

- IMAGE 16
- IMAGE 17
- Fill the cavity up to the overflow point of the urinal inner rod with water. SEE IMAGE 16
- 8. Insert the urinal rosette over the inner rod. **SEE IMAGE 17**

250ml Cero Stop 1

 Pour 250 ml of IFO Cero Stop oil ^ into the urinal bowl and wait for the oil to fill the urinal cavity.

Once the oil has filled the cavity the urinal is ready for another 5000 uses or 1 month of use. **SEE IMAGE 18**

^ CERO STOP OIL Product Code IFO91862

SPECIALIST PLUMBING SOLUTIONS

ADAPTABLE WORK & LIVING SOLUTIONS

ENVIRONMENTAL, HEALTH & SAFETY SOLUTIONS

STAINLESS STEEL WASHROOM SYSTEMS





ADDRESS: 9 Endeavour Road, Caringbah NSW 2229 Australia
POSTAL ADDRESS: P.O. Box 2545, Taren Point NSW 2229 Australia

PHONE: 61 2 8536 4000 **FAX**: 61 2 8556 4066

1300 369 273 (AUS) WWW.ENWARE.COM.AU INFO@ENWARE.COM.AU

Ifo - Cero Waterless Urinal

IF04125

Waterless urinal with an environmentally friendly oil is used as a water trap. Installation does not need any water or electrical connections.

FEATURES

- Made of vitreous china
- Waterless with an environmentally friendly oil is used as a water trap
- Quick & easy installation using plastic or brass tubing NOT copper in line with AS/NZS3500.2
- Sits on supplied wall hook
- Trap adaptor plus cap & lining elbow included
- Oil is advised to be replaced monthly or after 5000 uses
- Service is available by Rentokil, Initial or Pink



IFO4125 Cero Waterless Urinal including starter kit



Cero stop oil 6 x 250ml bottles **IFO91862** Cero detergent 6 x 500ml bottles **IFO91864**

SPARE PARTS

Rosette Part IFO96510
Oil Lock IFO96512
Tool With Sucker IFO96511







Version: Oct 12



Enware Australia Pty Limited 9 Endeavour Rd Caringbah NSW 2229 Australia Ph: 1300 369 273 Fax: 02 8556 4055



